

RanaPLUS

Part No. RLPB-16.7-24

Product RanaPlus LED Bar with 16.7mm pitch

- Features**
- Luminaire with anodized aluminium body
 - Custom lengths available (100mm PCB segment lengths)
 - PVC side gate (coverless, IP20 as standard)
 - Add optional polycarbonate luminair cover for IP44 protection
 - Polymer coating also available for IP66 protection

- Drivers**
- Compatible with our OLD-60D series (see page 54)

LED Spacing
16.7 mm

Rating
IP20
IP44
IP66

Power Consumption
24 watt/m

Lumen Output
2700 Lm

Voltage DC
24V

Part No. RLPB-11.1-24

Product RanaPlus LED Bar with 11.1mm pitch

- Features**
- Luminaire with anodized aluminium body
 - Custom lengths available (66.7mm PCB segment lengths)
 - PVC side gate (coverless, IP20 as standard)
 - Add optional polycarbonate luminair cover for IP44 protection
 - Polymer coating also available for IP66 protection

- Drivers**
- Compatible with our OLD-60D series (see page 54)

LED Spacing
11.1 mm


Rating
IP20
IP44
IP66

Power Consumption
36 watt/m

Lumen Output
4050 Lm

Voltage DC
24V

Colours

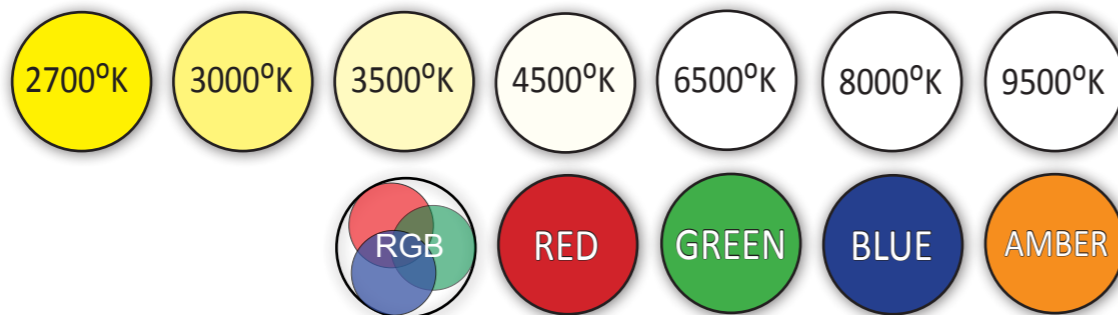

RanaPLUSPOWER

Part No. RLPB-50-24


LED Pitch: 50mm pitch
Lumen Output: 3200 lm
Power Consumption: 28 Watts/m

Part No. RLPB-66.7-24


LED Pitch: 66.7mm pitch
Lumen Output: 2400 lm
Power Consumption: 21 Watts/m

Dimensions

With Cover

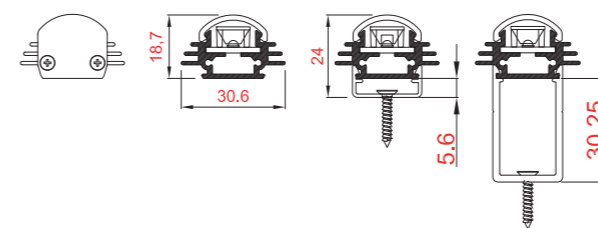


With Lens

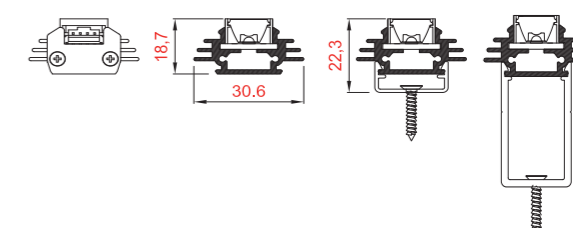

Mounting*

- Steel Clip
- Mechanical Mounting
- Double-sided Tape

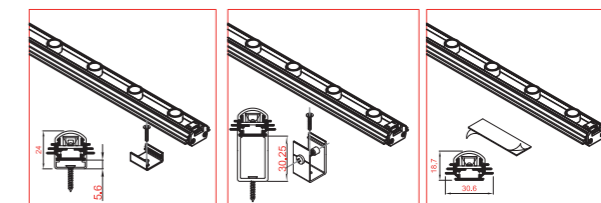


Protection*

- Coverless, IP 20
- Covered, IP44
- Polymer Coating, IP66



Lens/Beam Angle**

- Narrow Angle
- Medium Angle
- Lenseless, 120°

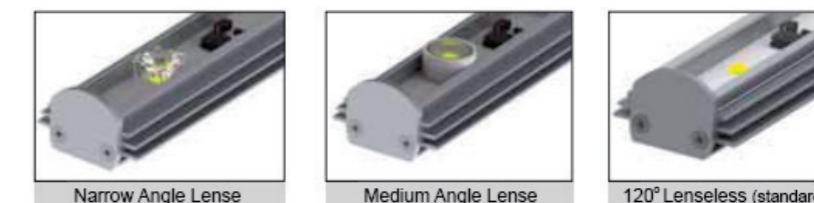

*These options are only available on RanaPlus Products.

**These options are only available on RanaPlusPower Products.