

Part No. RLPB-16.7-24

Product RanaPlus LED Bar with 16.7mm pitch

- Features**
- Luminaire with anodized aluminium body
 - Custom lengths available (within cutting range of LED line)
 - PVC side gate (coverless, IP20 as standard)
 - Add optional polycarbonate luminair cover for IP44 protection
 - Polymer coating also available for IP66 protection

- Drivers**
- Compatible with our OLD-60D series (see page 54)

LED Spacing	Rating	Power Consumption	Lumen Output	Voltage DC
16.7 mm	IP20 IP44 IP66	24 watt/m	2700 Lm	24V

Part No. RLPB-11.1-24

Product RanaPlus LED Bar with 11.1mm pitch

- Features**
- Luminaire with anodized aluminium body
 - Custom lengths available (within cutting range of LED line)
 - PVC side gate (coverless, IP20 as standard)
 - Add optional polycarbonate luminair cover for IP44 protection
 - Polymer coating also available for IP66 protection


- Drivers**
- Compatible with our OLD-60D series (see page 54)

LED Spacing	Rating	Power Consumption	Lumen Output	Voltage DC
11.1 mm	IP20 IP44 IP66	36 watt/m	4050 Lm	24V


Dimensions



With Cover

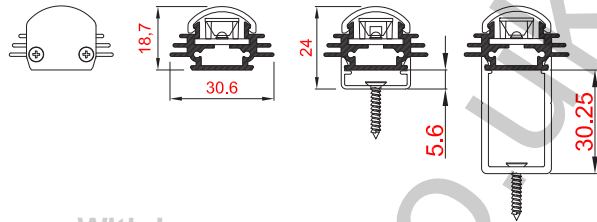


With Lens

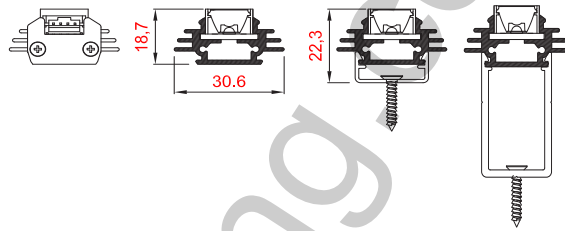

Mouting*

- Steel Clip
- Mechanical Mouting
- Double-sided Tape

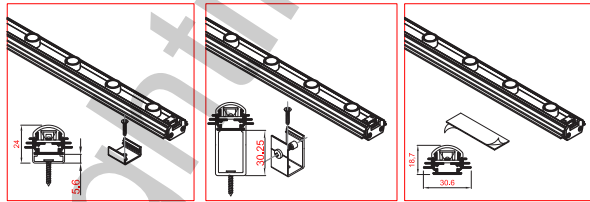

Protection*

- Coverless, IP 20
- Covered, IP44
- Polymer Coating, IP66



Coverless IP20



Transparent Cover IP44
Frosted/Opal Cover IP44



Polymer coating with cover IP66
Polymer coating without cover IP66

Lens/Beam Angle*

- Narrow Angle
- Medium Angle
- Lenseless, 120°



Narrow Angle Lens




Medium Angle Lens



120° Lenseless (standard)

Colours

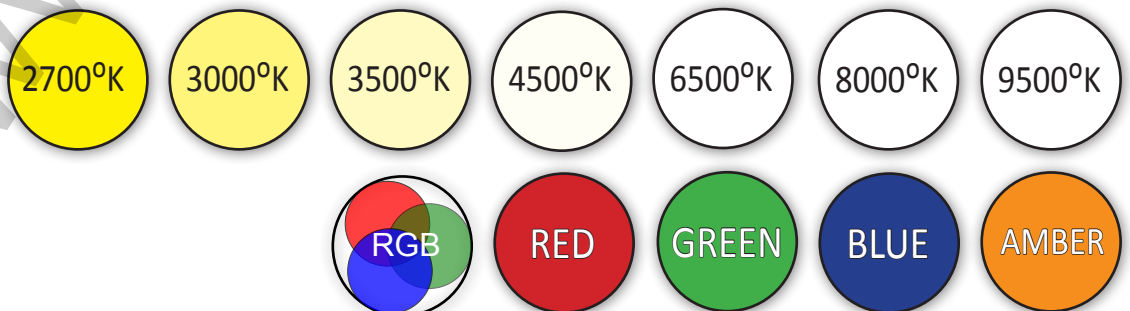

*These options are only available on RanaPlus Products.