




RanaPlus

Features

- Luminaire with anodized aluminium body
- Available in 400, 800, 1200, 1600 and 2000 mm dimensions.
- Operating ambient temperature -25° to +60°C
- 50,000 hours Lamp life at 50°C
- PVC side gate (IP20 as standard)
- Optional polycarbonate luminair cover for IP44 protection in transparent, frosted or opal.
- Polymer coating available for IP66 protection
- Custom lengths available (within cutting range of LED line)


LENS OPTIONS

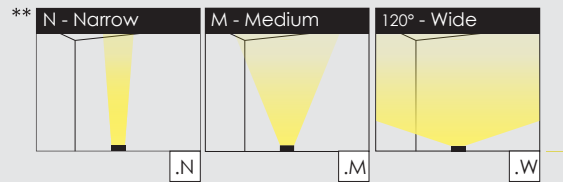

LUMINAIRE CODE AND DETAILS

. All of the measurements for product are in mm.

Code	Power	Beam Angle	Luminous Flux	Voltage	LED Spacing	Length (A)
RLPB16.7	24W/M	120°	2700lm	24VDC	16.7mm	400, 800, 1200, 1600, 2000
RLPB11.1	36W/M	120°	4050lm	24VDC	11.1mm	400, 800, 1200, 1600, 2000
RLPB50	28W/M	N,M & 120°	3200lm	24VDC	50mm	400, 800, 1200, 1600, 2000
RLPB166.7	21W/M	N,M & 120°	2400lm	24VDC	66.7mm	400, 800, 1200, 1600, 2000

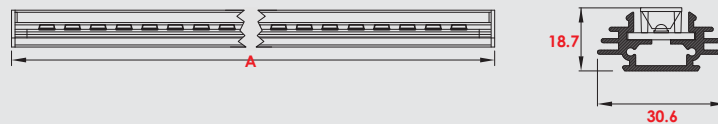

Driver Options

- Dimable 1 -10 .DIM
- Dali .DI

Diffuser

- Clear .CD
- Opal .OD
- Frosted .FD

CRI

- 80
- .C8

IP Rating

- 20
- 44
- 66
- .20 .44 .66

LED Colours

- 2700.27
- 3000.30
- 3500.35
- 4500.45
- 6500.65
- 8000.80
- 9500.95
- Red .RD
- Amber .AM
- Green .GN
- Blue .BL
- RGB .RGB



ASSEMBLY BRACKETS & TAPE

. All of the measurements for product are in mm.

