




VistaLED Linear

Features

- Designed for illuminating structures and building facades
- Premium Grade CREE LED 140Lm/W
- 3.5° Beam angle resulting in 50Lux at 66m height and 41m for RGB version
- Operating ambient temperature -25° to +60°C
- 50,000 hours Lamp life at 50°C
- Extruded anodized aluminum housing and die-cast aluminum end caps
- Tempered glass diffuser
- DMX512 Compatible for RGB version


LENS OPTIONS



LUMINAIRE CODE AND DETAILS

. All of the measurements for product are in mm.

Code	Power	Beam Angle	Voltage	LED Qty.	Length
VLL28	28W	3.5°	24VDC	12 Pcs	540mm
VLL28RGB	28W	3.5°	24VDC	12 Pcs	540mm

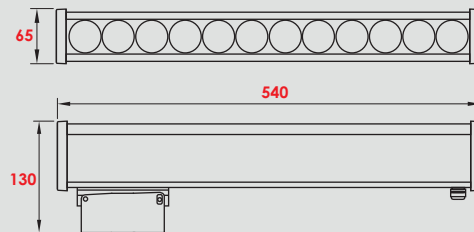

CRI

80
.C8

IP Rating

67
.67

LED Colours

- 3000.30 ● Red .RD
- 3500.35 ● Amber .AM
- 4500.45 ● Green .GN
- 6500.65 ● Blue .BL
- 8000.80 ● RGB .RGB



Driver Options

- Dimable 1 -10 .DIM
- Dali .DI