




VistaLED Linear

Features

- Designed for illuminating structures and building facades
- Premium Grade CREE LED 140lm/W
- 3.5° Beam angle resulting in 50Lux at 132m height and 83m for RGB version
- Operating ambient temperature -25° to +60°C
- 50,000 hours Lamp life at 50°C
- Extruded anodized aluminum housing and die-cast aluminum end caps
- Tempered glass diffuser
- DMX512 Compatible for RGB version


LENS OPTIONS



LUMINAIRE CODE AND DETAILS

. All of the measurements for product are in mm.

Code	Power	Beam Angle	Voltage	LED Qty.	Length
VLL110	110Watt	3.5°	24VDC	48 Pcs	660mm
VLL110RGB	110Watt	3.5°	24VDC	48 Pcs	660mm

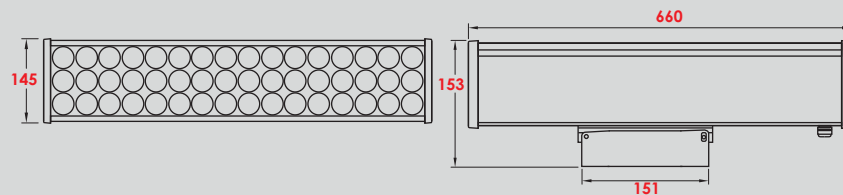

CRI

80
.C8

IP Rating

67
.67

LED Colours

● 3000.30	● Red .RD
● 3500.35	● Amber .AM
● 4500.45	● Green .GN
● 6500.65	● Blue .BL
○ 8000.80	● RGB .RGB



Driver Options

Dimable 1 -10 .DIM
Dali .DI