




# VistaLED Linear

## Features

- Designed for illuminating structures and building facades
- Premium Grade CREE LED 140Lm/W
- 3.5° Beam angle resulting in 50Lux at 163m height and 102m for RGB version
- Operating ambient temperature -25° to +60°C
- 50,000 hours Lamp life at 50°C
- Extruded anodized aluminum housing and die-cast aluminum end caps
- Tempered glass diffuser
- DMX512 Compatible for RGB version


## LENS OPTIONS



## LUMINAIRE CODE AND DETAILS

. All of the measurements for product are in mm.

Code	Power	Beam Angle	Voltage	LED Qty.	Length
<b>VLL160</b>	160W	3.5°	24VDC	72 Pcs	1080mm
<b>VLL160RGB</b>	160W	3.5°	24VDC	72 Pcs	1080mm

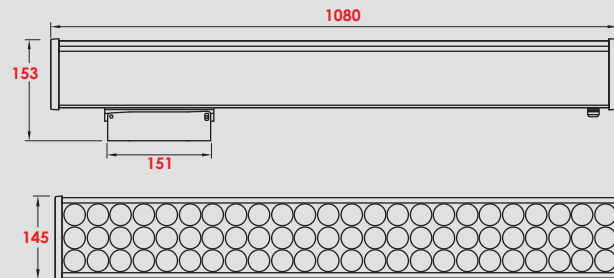

**CRI**  
80  
.C8

**IP Rating**  
67  
.67

**LED Colours**

● 3000.30	● Red .RD
● 3500.35	● Amber .AM
● 4500.45	● Green .GN
● 6500.65	● Blue .BL
○ 8000.80	● RGB .RGB



## Driver Options

Dimable 1 -10 .DIM  
Dali .DI