




# VistaLED Projector

## Features

- Designed for illuminating structures and building facades
- Premium Grade CREE LED
- 4.5° Symmetric beam angle or 15x55° to the application demand
- Operating ambient temperature -25° to +60°C
- 50,000 hours Lamp life at 50°C
- Housing in 6063 aluminum alloy
- Tempered glass diffuser
- DMX512 Compatible for RGB version


## LENS OPTIONS

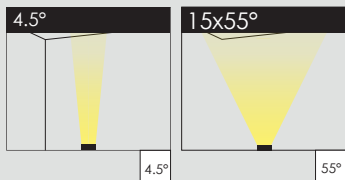

## LUMINAIRE CODE AND DETAILS

. All of the measurements for product are in mm.

Code	Power	Luminous Flux	Voltage	LED Qty.
VLP46	46Watt	3680lm@4000K	AC100-240V	18 Pcs
VLP46RGB	46Watt	-	AC100-240V	18 Pcs

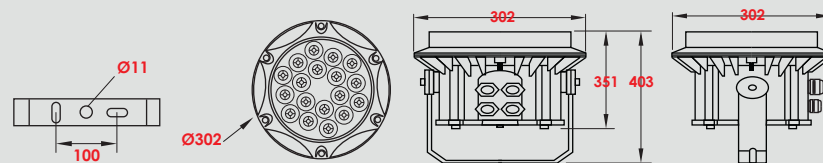

**CRI**  
80  
.C8

**IP Rating**  
67  
.67

**LED Colours**

3000.30	Red	.RD
3500.35	Amber	.AM
4500.45	Green	.GN
6500.65	Blue	.BL
8000.80	RGB	.RGB

