




# VistaLED Projector

## Features

- Designed for illuminating structures and building facades
- Premium Grade CREE LED
- 4.5° Symmetric beam angle or 15x55° to the application demand
- Operating ambient temperature -25° to +60°C
- 50,000 hours Lamp life at 50°C
- Housing in 6063 aluminum alloy
- Tempered glass diffuser
- DMX512 Compatible for RGB version


## LENS OPTIONS



## LUMINAIRE CODE AND DETAILS

. All of the measurements for product are in mm.

Code	Power	Luminous Flux	Voltage	LED Qty.
VLP65	65Watt	5200lm@4000K	AC100-240V	27 Pcs
VLP65RGB	65Watt	-	AC100-240V	27 Pcs

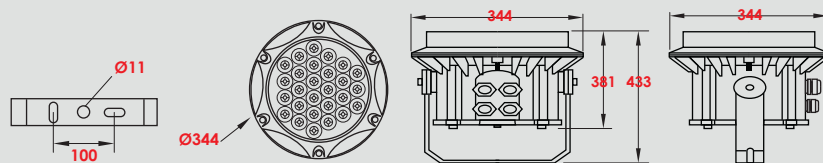

### CRI

80  
.C8

### IP Rating

67  
.67

### LED Colours

- 3000.30
- 3500.35
- 4500.45
- 6500.65
- 8000.80
- Red .RD
- Amber .AM
- Green .GN
- Blue .BL
- RGB .RGB

