




VistaLED Projector

Features

- Designed for illuminating structures and building facades
- Premium Grade CREE LED
- 4.5° Symmetric beam angle or 15x55° to the application demand
- Operating ambient temperature -25° to +60°C
- 50,000 hours Lamp life at 50°C
- Housing in 6063 aluminum alloy
- Tempered glass diffuser
- DMX512 Compatible for RGB version


LENS OPTIONS

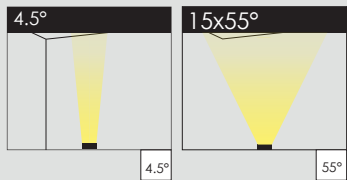

LUMINAIRE CODE AND DETAILS

. All of the measurements for product are in mm.

Code	Power	Luminous Flux	Voltage	LED Qty.
VLP85	85Watt	6800lm@4000K	AC100-240V	54 Pcs
VLP85RGB	85Watt	-	AC100-240V	54 Pcs

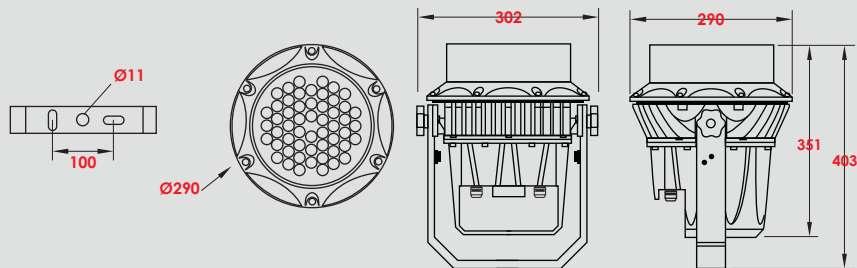

CRI

80
.C8

IP Rating

67
.67

LED Colours

- 3000 .30
- 3500 .35
- 4500 .45
- 6500 .65
- 8000 .80
- Red .RD
- Amber .AM
- Green .GN
- Blue .BL
- RGB .RGB

